

ELKAY[®]

SPECIFICATIONS

EZH2O™ – In-Wall Recessed Bottle Filling Station

Models LZWSM8K & LZWSMDK

PRODUCT FEATURES


- Designed for in-wall installations
- Space saving ADA-compliant design
- Sanitary, no-touch, sensor activation with automatic 20-second shut-off timer
- WaterSentry[®] Plus 3000 gallon filter included
- Silver ion anti-microbial protection
- Quick fill rate is 1.1 gpm for refrigerated units and 1.5 gpm for non-refrigerated units
- Visual user interface display includes:
 - Filter Monitor indicating when replacement is necessary
 - Green Ticker™ counts the quantity of plastic bottles saved from waste
- Includes mounting frame for quick and simple installation
- Hinged door for easy servicing
- Constructed of durable 18 gauge stainless steel and ABS plastic

Model LZWSM8K provides 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Model LZWSMDK is non-refrigerated and provides ambient water. Shall be recessed design and constructed of 18 gauge Type 300 series stainless steel and ABS plastic. Shall include electronic sensor for no-touch activation with automatic 20-second shut-off timer. Shall provide 1.1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Shall include the WaterSentry[®] Plus, certified to NSF/ANSI 42 and 53 for lead reduction, with visual monitor to indicate when replacement is necessary. Shall meet ADA guidelines for reach ranges, when properly installed. Shall be lead-free design which meets Safe Drinking Water Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.

SUGGESTED SPECIFICATION

2222 Camden Court Phone: 630-572-3192
Oak Brook, IL 60523 Web: Elkayusa.com

IMAGES

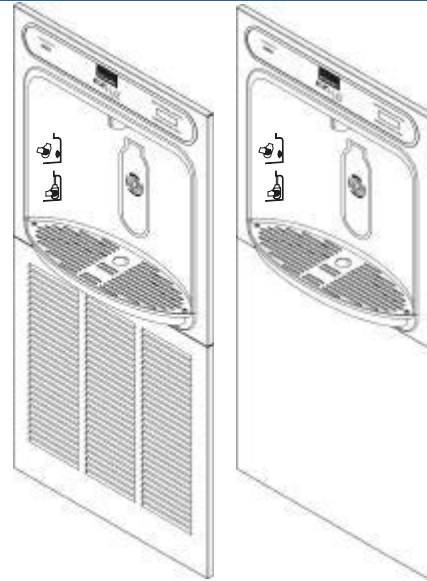

Model LZWSM8K
(refrigerated)

Model LZWSMDK
(non-refrigerated)

- 51300C Replacement filter (available as single or packs of 3, 12, 24 or 48)

OPTIONAL ACCESSORIES

Ideal for stand-alone applications or paired with SwirlFlo[®] and Soft Sides[®] fountains in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings

APPLICATIONS

Third Party Certified to:

- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953
- NSF/ANSI 42 and 53 (Filter)



ELKAY[®]

SPECIFICATIONS

EZH20™ – In-Wall Filterless Recessed Bottle Filling Station

Models EZWSM8K & EZWSMDK


PRODUCT FEATURES

- Designed for in-wall installations
- Space saving ADA-compliant design
- Sanitary, no-touch, sensor activation with automatic 20-second shut-off timer
- Silver ion anti-microbial protection
- Quick fill rate is 1.1 gpm for refrigerated units and 1.5 gpm for non-refrigerated units
- Visual user interface display includes:
 - Green Ticker™ counts the quantity of plastic bottles saved from waste
- Includes mounting frame for quick and simple installation
- Hinged door for easy servicing
- Constructed of durable 18 gauge stainless steel and ABS plastic

Model EZWSM8K provides 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model EZWSMDK is non-refrigerated and provides ambient water. Shall be recessed design and constructed of 18 gauge Type 300 series stainless steel and ABS plastic. Shall include electronic sensor for no-touch activation with automatic 20-second shut-off timer. Shall provide 1.1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Shall meet ADA guidelines for reach ranges, when properly installed. Shall be lead-free design which meets Safe Drinking Water Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.

SUGGESTED SPECIFICATION

IMAGES

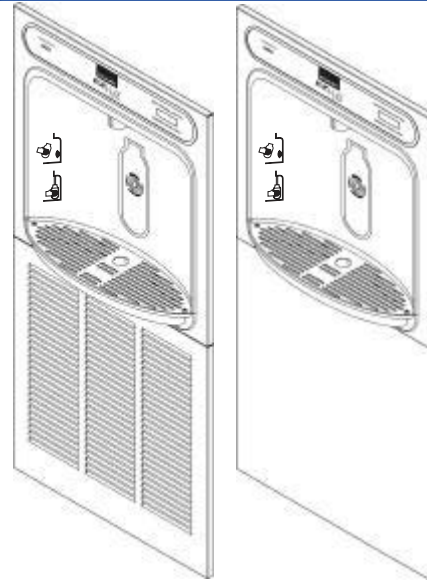

Model EZWSM8K
(refrigerated)

Model EZWSMDK
(non-refrigerated)

OPTIONAL ACCESSORIES

Ideal for stand-alone applications or paired with SwirlFlo® and Soft Sides® fountains in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings

APPLICATIONS

2222 Camden Court Phone: 630-572-3192
Oak Brook, IL 60523 Web: Elkayusa.com



Third Party Certified to:


- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953

ELKAY®

ROUGH-IN DIMENSIONS

Rated for Indoor Use Only

EZH20 In-Wall Refrigerated

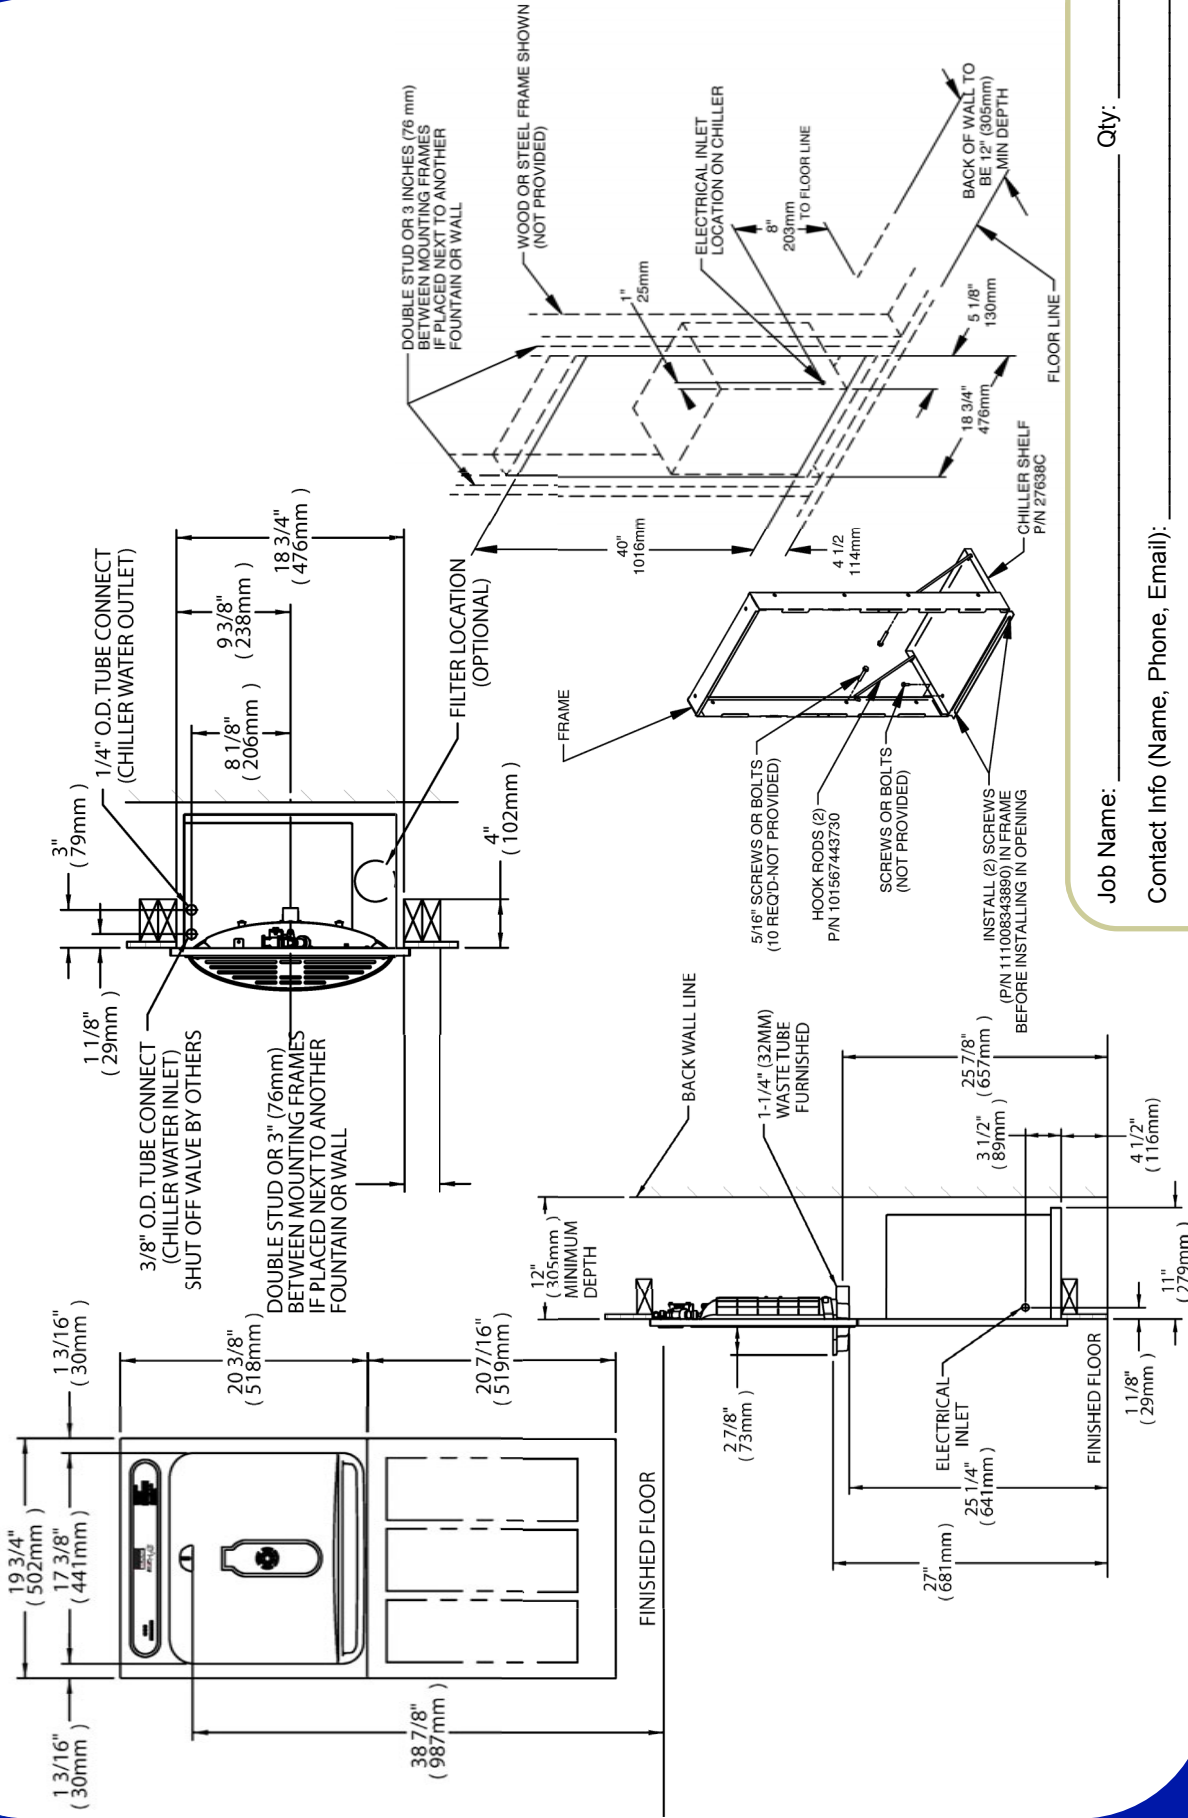

Job Name: _____ Qty: _____

Contact Info (Name, Phone, Email): _____

Approval for Manufacture — Signature and Date: _____

Comments: _____

2222 Camden Court
Oak Brook, IL 60523
Phone: 630-572-3192
Web: Elkayusa.com


Specifications and measurements are subject to change without notification.
Please visit elkayusa.com for most current version.

ELKAY®

ROUGH-IN DIMENSIONS

Rated for Indoor Use Only

EZH2O In-Wall Non-Refrigerated

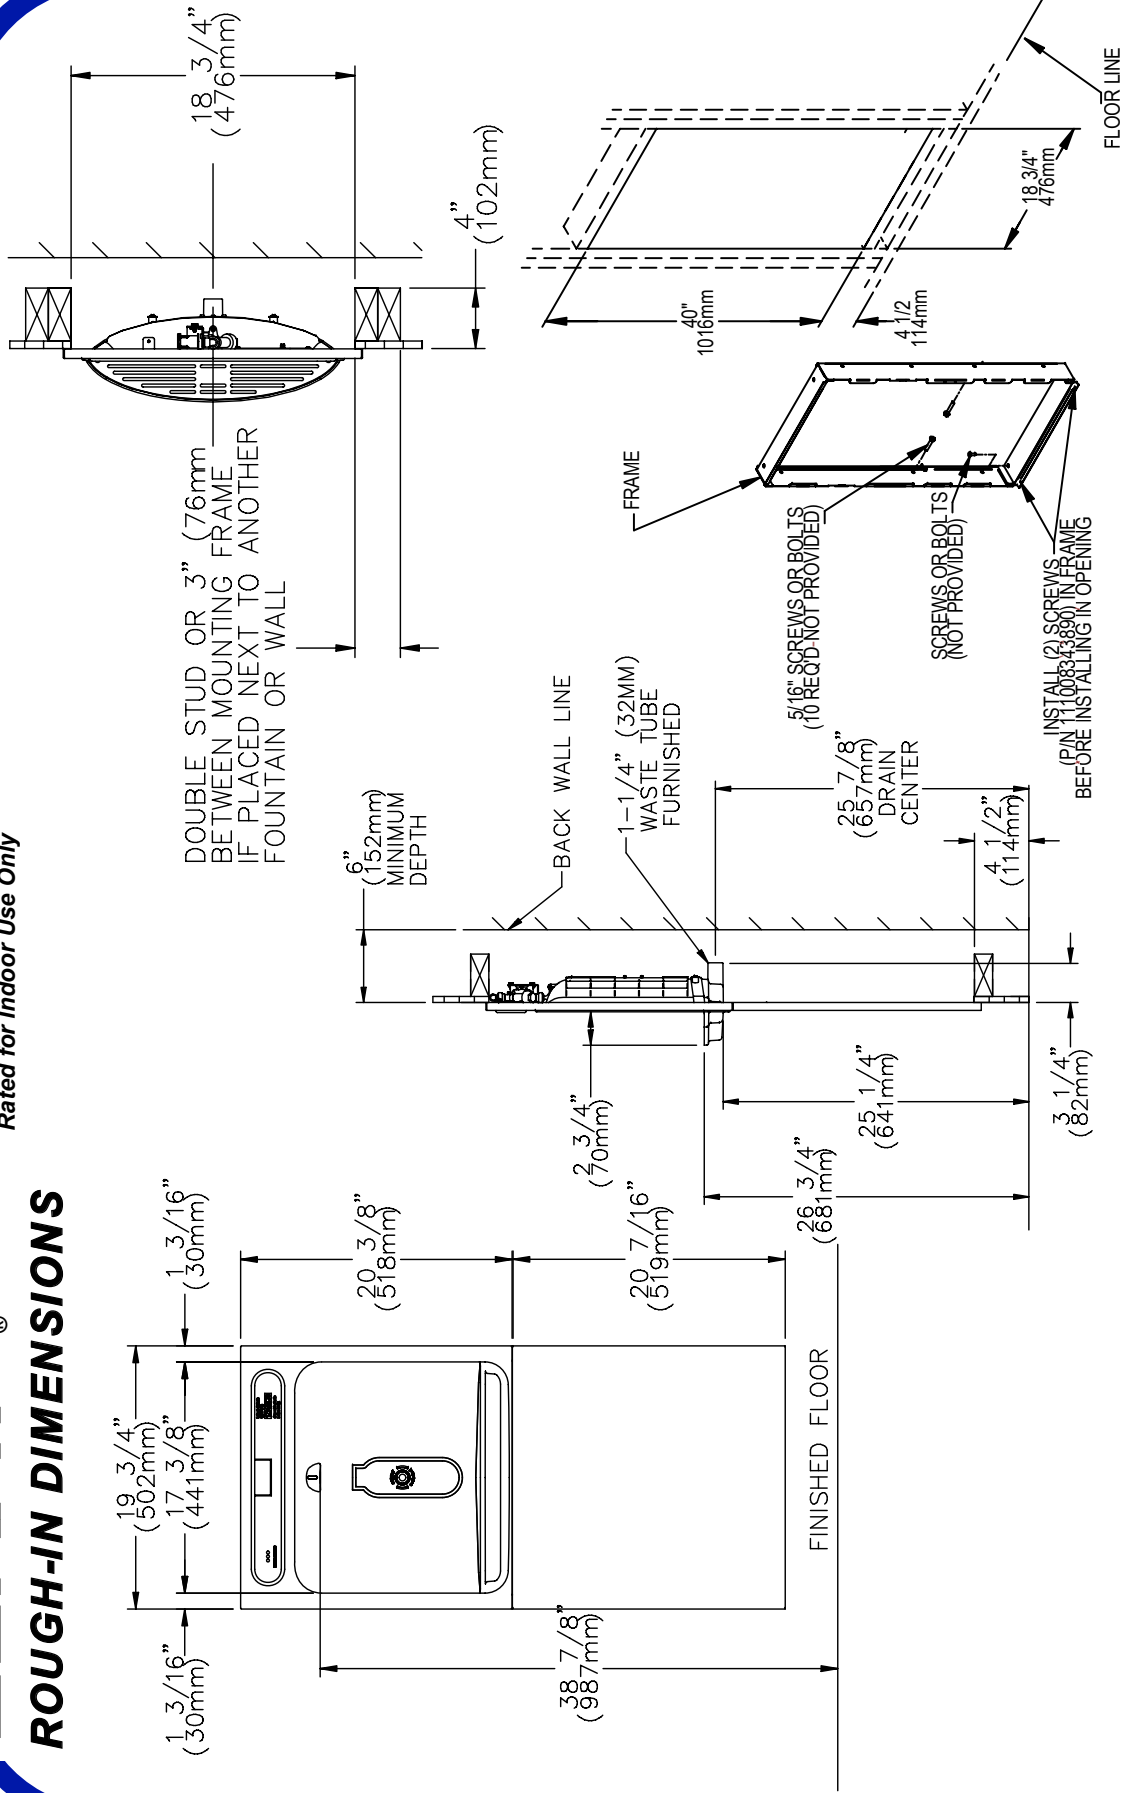

Job Name: _____

Qty: _____

Contact Info (Name, Phone, Email): _____

Approval for Manufacture — Signature and Date: _____

Comments: _____

Specifications and measurements are subject to change without notification. Please visit elkayusa.com for most current version.

2222 Camden Court
Oak Brook, IL 60523
Phone: 630-572-3192
Web: Elkayusa.com

ELKAY[®]

SPECIFICATIONS

EZH2O™ – In-Wall Recessed Bottle Filling Station

Models LZWSM8PK & LZWSMDPK
(For use with non-refrigerated SwirlFlo[®] Fountains)

PRODUCT FEATURES


- Designed for in-wall installations with non-refrigerated SwirlFlo (EDFPBM) models
- Space saving ADA-compliant design
- Sanitary, no-touch, sensor activation with automatic 20-second shut-off timer
- WaterSentry[®] Plus 3000 gallon filter included
- Silver ion anti-microbial protection
- Quick fill rate is 1.1 gpm for refrigerated units and 1.5 gpm for non-refrigerated units
- Visual user interface display includes:
 - Filter Monitor indicating when replacement is necessary
 - Green Ticker™ counts the quantity of plastic bottles saved from waste
- Includes mounting frame for quick and simple installation
- Hinged door for easy servicing
- Constructed of durable 18 gauge stainless steel and ABS plastic

Model LZWSM8K provides 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Model LZWSMDK is non-refrigerated and provides ambient water. Shall be recessed design and constructed of 18 gauge Type 300 series stainless steel and ABS plastic. Shall include electronic sensor for no-touch activation with automatic 20-second shut-off timer. Shall provide 1.1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Shall include the WaterSentry[®] Plus, certified to NSF/ANSI 42 and 53 for lead reduction, with visual monitor to indicate when replacement is necessary. Shall meet ADA guidelines for reach ranges, when properly installed. Shall be lead-free design which meets Safe Drinking Water Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.

SUGGESTED SPECIFICATION

2222 Camden Court Phone: 630-572-3192
Oak Brook, IL 60523 Web: Elkayusa.com

IMAGES

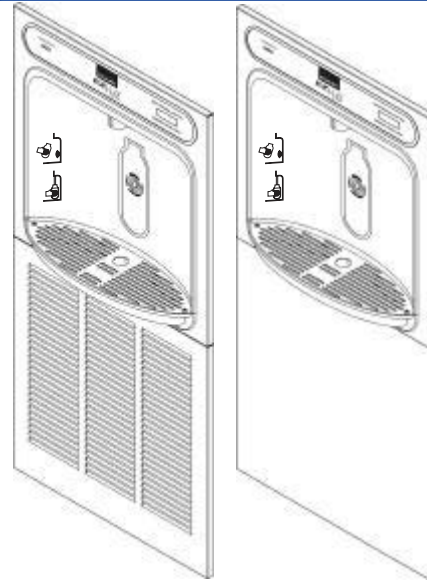

Model LZWSM8PK
(refrigerated)

Model LZWSMDPK
(non-refrigerated)

- 51300C Replacement filter (available as single or packs of 3, 12, 24 or 48)

OPTIONAL ACCESSORIES

Designed for use with SwirlFlo (EDFPBM) non-refrigerated fountains or as stand-alone in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings

APPLICATIONS

Third Party Certified to:

- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953
- NSF/ANSI 42 and 53 (Filter)



ELKAY[®]

SPECIFICATIONS

EZH20™ – In-Wall Filterless Bottle Filling Station

Models EZWSM8PK & EZWSMDPK
(For use with non-refrigerated SwirlFlo Fountains)

PRODUCT FEATURES


- Designed for in-wall installations with non-refrigerated SwirlFlo (EDFPBM) models
- Space saving ADA-compliant design
- Sanitary, no-touch, sensor activation with automatic 20-second shut-off timer
- Silver ion anti-microbial protection
- Quick fill rate is 1.1 gpm for refrigerated units and 1.5 gpm for non-refrigerated units
- Visual user interface display includes:
 - Green Ticker™ counts the quantity of plastic bottles saved from waste
- Includes mounting frame for quick and simple installation
- Hinged door for easy servicing
- Constructed of durable 18 gauge stainless steel and ABS plastic

Model EZWSM8K provides 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Model EZWSMDK is non-refrigerated and provides ambient water. Shall be recessed design and constructed of 18 gauge Type 300 series stainless steel and ABS plastic. Shall include electronic sensor for no-touch activation with automatic 20-second shut-off timer. Shall provide 1.1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Shall meet ADA guidelines for reach ranges, when properly installed. Shall be lead-free design which meets Safe Drinking Water Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.

SUGGESTED SPECIFICATION

2222 Camden Court Phone: 630-572-3192
Oak Brook, IL 60523 Web: Elkayusa.com

IMAGES

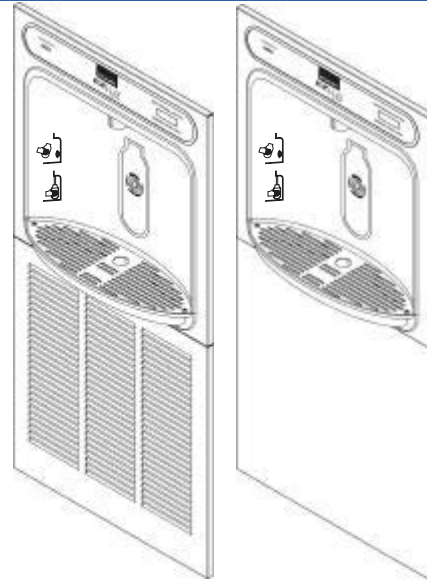

Model EZWSM8PK
(refrigerated)

Model EZWSMDPK
(non-refrigerated)

OPTIONAL ACCESSORIES

Designed for use with SwirlFlo (EDFPBM) non-refrigerated fountains or as stand-alone in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings

APPLICATIONS

Third Party Certified to:

- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953




ELKAY®

Rated for Indoor Use Only

Models for use with EDFPB units

ROUGH-IN DIMENSIONS

***NOTE**
These models are designed for use with EDFPB fountains.

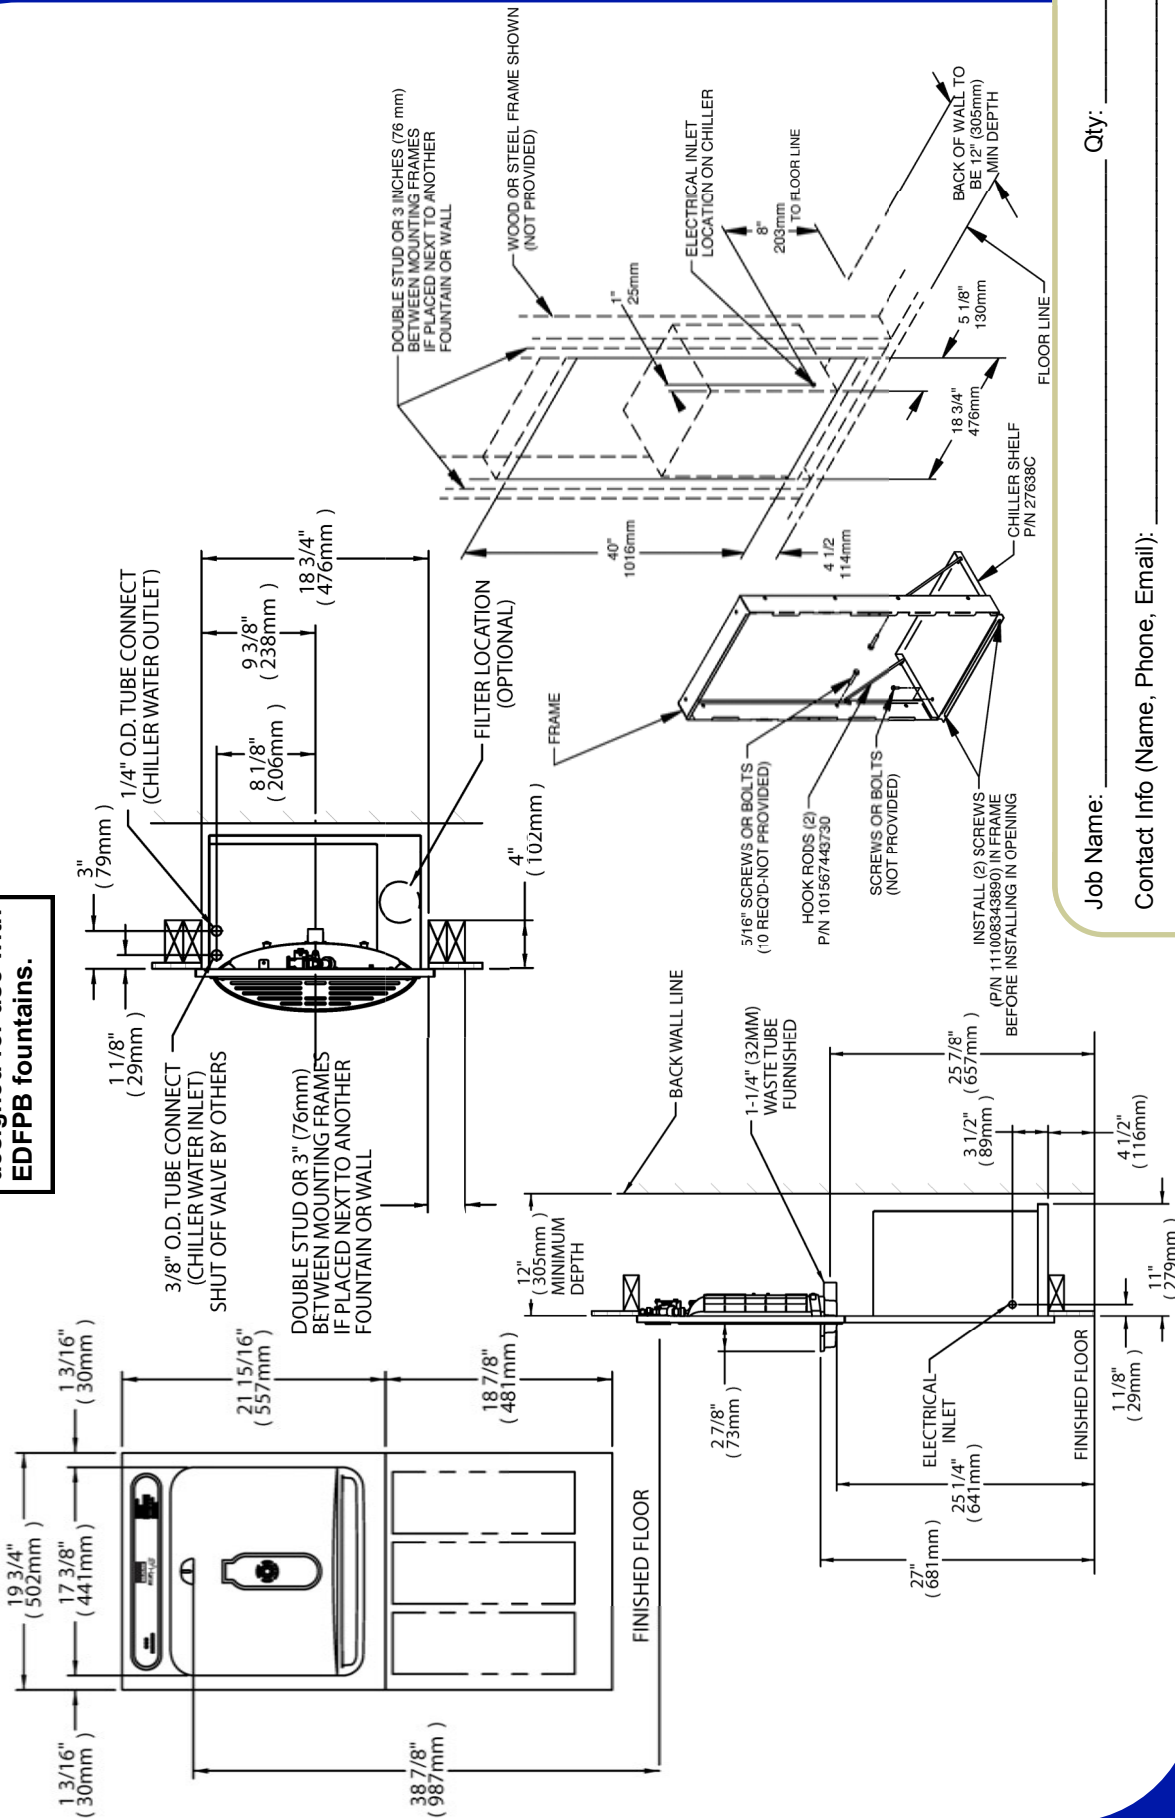

Job Name: _____ Qty: _____

Contact Info (Name, Phone, Email): _____

Approval for Manufacture— Signature and Date: _____

Comments: _____

Specifications and measurements are subject to change without notification.
Please visit elkayusa.com for most current version.

2222 Camden Court
Oak Brook, IL 60523
Phone: 630-572-3192
Web: Elkayusa.com