



WaterSentry® 51300C Standard Lead Filter

- 3,000-gallon capacity
- Tested and certified to NSF/ANSI 42, 53 and 401 to reduce lead, microplastics, cysts, Class I particulate, and chlorine taste and odor
- Use with Elkay filtered bottle filling stations and ezH2O Liv® Pro



WaterSentry 51600C High-Capacity Lead Filter

- 6,000-gallon capacity
- Long-lasting filter means fewer replacements and less maintenance
- Tested and certified to NSF/ANSI 42, 53 and 401 to reduce lead, microplastics, cysts, Class I particulate, and chlorine taste and odor
- Use with Elkay filtered bottle filling stations
- Cost and labor savings lowers your total cost of ownership



WaterSentry 71300C PFOA/PFOS Filter

- 2,250-gallon capacity
- Most contaminants reduced
- Tested and certified to NSF/ANSI 42, 53 and 401 to reduce PFOA/PFOS, lead, microplastics, cysts, Class I particulate, and chlorine taste and odor
- Highest-performing point-of-use filter on the market
- Provides highest water quality
- Use with Elkay filtered bottle filling stations, Avado® filtered faucet and beverage faucet

[Learn more at elkay.com/filtration](https://www.elkay.com/filtration)

ELKAY®

SPECIFICATIONS

PRODUCT SPECIFICATIONS

WaterSentry® Lead + Microplastics NSF/ANSI Certified Filter (Bottle Fillers) Model(s) 51300C

WaterSentry® Lead + Microplastics NSF/ANSI Certified Filter (Bottle Fillers). Overall dimensions are 3-1/8" x 3-1/8" x 9-1/2".

Special Features:	Filtered
Dimensions:	3-1/8" x 3-1/8" x 9-1/2"
Shipping Weight:	2 lbs.
Flow Rate:	1.5 GPM (5.6 L/m)
Capacity:	3000 gal. (11356 L)
Temperature:	40-100°F (4-38°C)
Initial Pressure Drop:	2-5 PSI (14-34 kPa)
Maximum Pressure:	105 PSI (724 kPa)
Minimum Pressure:	20 PSI (138 kPa)
Water Inlet:	3/8" (9.5mm) O.D. tube
Water Outlet:	1/4" (6.4mm) O.D. tube

Special Note: Replacement filter for use in ezH2O Bottle Filling Stations, Liv Pro Water Dispensers, and Universal EWF3000 WaterSentry systems.

- Replacement filter for Elkay bottle filling stations and ezH2O Liv
- Filter is tested and certified to NSF/ANSI 42, 53 and 401 for the reduction of lead, microplastics, Class 1 particulate, cysts, and chlorine taste and odor
- Filter should be replaced every 3,000 gallons or 1 year after installation
- Equipped with quick-disconnect, 1/4-turn installation, as well as automatic inlet shut-off valve that closes when filter is removed
- Provides filtration at the point of use where needed
- Pairs with EWF3000 universal filtration kit to upgrade any beverage system or faucet to filtered





Included with Product: 3000 gallon replacement filter cartridge

A Century of Tradition and Quality.

For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

Product Compliance: NSF 372 (lead free)
NSF 42 NSF 53 NSF 401

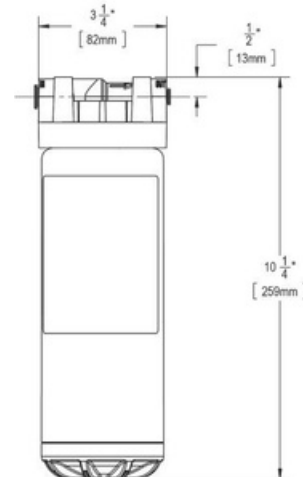

PART: _____ QTY: _____
 PROJECT: _____
 CONTACT: _____
 DATE: _____
 NOT ES: _____
 APPROVAL: _____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

WaterSentry® Lead + Microplastics NSF/ANSI Certified High-Capacity Filter (Enhanced Bottle Fillers). Overall dimensions are 3-1/8" x 3-1/8" x 9-1/2".



Special Features:	Filtered
Dimensions:	3-1/8" x 3-1/8" x 9-1/2"
Shipping Weight:	2 lbs.
Flow Rate:	1.5 GPM (5.6 L/m)
Capacity:	
Temperature:	40-100°F (4-38°C)
Initial Pressure Drop:	2-5 PSI (14-34 kPa)
Maximum Pressure:	105 PSI (724 kPa)
Minimum Pressure:	20 PSI (138 kPa)
Water Inlet:	3/8" (9.5mm) O.D. tube
Water Outlet:	1/4" (6.4mm) O.D. tube



Special Note: Replacement filter for use in Enhanced ezH2O Bottle Filling Stations.

- Replacement filter for Elkay enhanced ezH2O bottle filling stations in high-traffic areas
- Filter is tested and certified to NSF/ANSI 42, 53 and 401 for the reduction of lead, microplastics, Class 1 particulate, cysts, and chlorine taste and odor
- Highest-capacity filter minimizes filter changes and maintenance costs for safer hydration without the hassle.
- Filter should be replaced every 6,000 gallons or 1 year after installation.
- Equipped with quick-disconnect, 1/4-turn installation, as well as automatic inlet shut-off valve that closes when filter is removed
- Provides filtration at the point of use where needed

A Century of Tradition and Quality.

For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

Product Compliance: NSF 42 NSF 53 NSF 372 (lead free) NSF 401

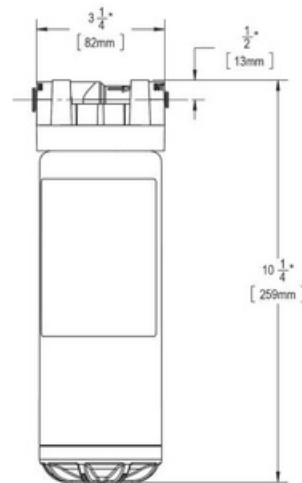

PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____

DATE: _____

NOT ES: _____

APPROVAL: _____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

ELKAY®

SPECIFICATIONS

PRODUCT SPECIFICATIONS

WaterSentry® PFOA/PFOS (PFAS) + Lead + Microplastics NSF/ANSI Certified Filter (Enhanced Bottle Fillers) Model(s) 71300C

WaterSentry® PFOA/PFOS (PFAS) + Lead + Microplastics
NSF/ANSI Certified Filter (Enhanced Bottle Fillers). Overall
dimensions are 3-5/16" x 3-5/16" x 11-5/8".



Special Features:	Filtered
Dimensions:	3-5/16" x 3-5/16" x 11-5/8"
Shipping Weight:	2 lbs.
Flow Rate:	1.1 GPM (4.2 L/m)
Capacity:	2250 gal. (8517 L)
Temperature:	40-100°F (4-38°C)
Initial Pressure Drop:	2-5 PSI (14-34 kPa)
Maximum Pressure:	105 PSI (724 kPa)
Minimum Pressure:	20 PSI (138 kPa)
Water Inlet:	3/8" (9.5mm) O.D. tube
Water Outlet:	1/4" (6.4mm) O.D. tube

Special Note: Replacement filter for use in Enhanced ezH2O Bottle Filling Stations.



- Replacement filter for Elkay enhanced ezH2O bottle filling stations and faucets
- Filter is tested and certified to NSF/ANSI 42, 53 and 401 for the reduction of PFOA and PFOS (two prevalent PFAS chemicals), lead, microplastics, Class 1 particulate, cysts, and chlorine taste and odor
- Filter should be replaced every 2,250 gallons or 1 year after installation
- Equipped with quick-disconnect, 1/4-turn installation, as well as automatic inlet shut-off valve that closes when filter is removed
- Provides filtration at the point of use where needed
- Pairs with EWF3001 universal filtration kit to upgrade any beverage system or faucet to filtered

Included with Product: 2250 gallon replacement filter cartridge

A Century of Tradition and Quality.

For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.

Product Compliance: NSF 42 NSF 53 NSF 372 (lead free) NSF 401

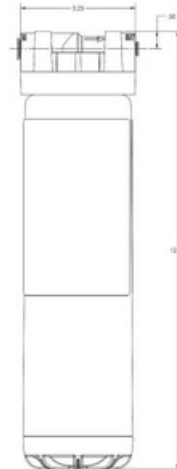

PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____

DATE: _____

NOT ES: _____

APPROVAL: _____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.